
Permission sets

DEXPRO Core ships a small set of permission sets that control who can configure the module and who can work with Core documents and rules day to day. Assign them to users in the same way as any other Business Central permission set.

Available permission sets

Two of the permission sets are intended for direct assignment to users. The third is an internal building block that is referenced only by the module's entitlements and is not meant to be assigned on its own.

Permission set	Audience	Rights
DEXPRO Core Admin	Administrators and consultants who set up and maintain the module.	Full **Read, Insert, Modify, Delete (RIMD)** on all DEXPRO Core tables, plus execute rights on all objects. Required to run setup, manage the DEXPRO Apps registry, configure the File Viewer and OAuth/OpenID connections, and create jobs.
DEXPRO Core User	Day-to-day users who process documents and work with rules.	Reduced rights on configuration tables (for example Core Setup and the DEXPRO Apps registry are read/modify but **no delete**), and full rights on operational data such as Core documents and rules. The OAuth 2.0 and OpenID connection settings are **read-only** — enough for features such as the File Viewer to request tokens — and their setup pages are not included, so connections and client secrets can only be maintained with **DEXPRO Core Admin**. Suitable for purchasing agents and processing clerks.
DEXPRO Core Objects - Exec	Internal building block — **not for direct assignment**.	Wildcard **execute** permission on the module's objects. Not included in the Admin and User sets, but referenced only by the module's entitlements, which make the module's objects available to licensed users. Assign the Admin or User set instead.

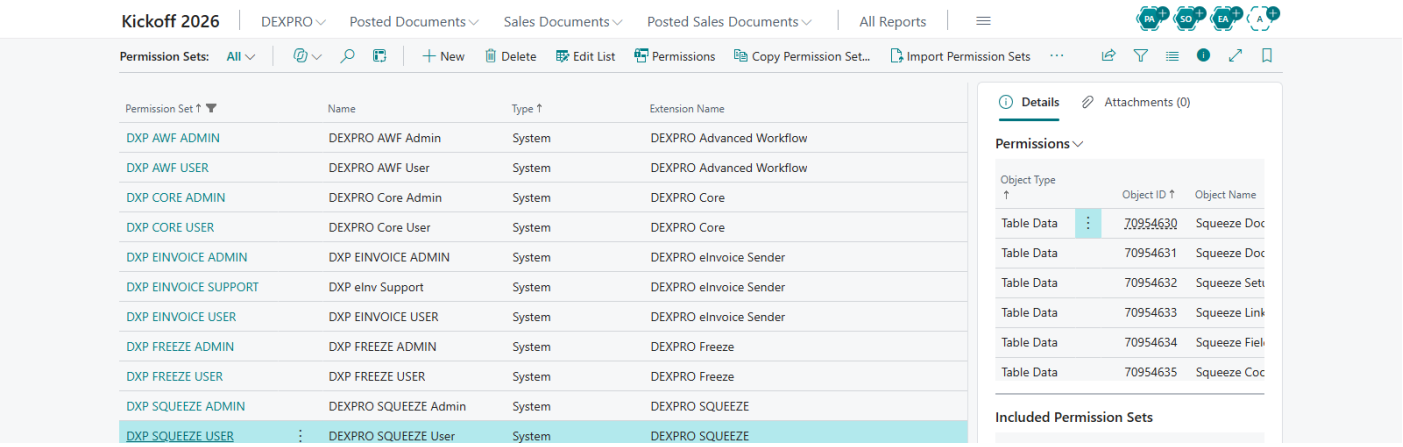

Assigning a permission set

- Open the **Permission Sets** page (search for "Permission Sets").
- Locate **DEXPRO Core Admin** or **DEXPRO Core User**.
- Assign it to the relevant users or user groups via **User Setup**, the **Users** page, or your usual security groups.

> Assign **DEXPRO Core Admin** only to the people responsible for configuration. Regular processing users should receive **DEXPRO Core User**.

> Do not assign **DEXPRO Core Objects - Exec** directly. It grants only execute rights and, on its own, does not give the data access users need. It exists only for the module's entitlements.

Related features

- Licenses
- Core Setup

Revision #4
Created 2026-07-22 07:21:08 UTC by Bernd Feddersen
Updated 2026-11-19 11:11:22 UTC by Bernd Feddersen