



Lizenzierung

Bitten Sie das Dexpro-Team um die Erstellung einer Lizenz für einen neuen Mandanten. Sobald Sie diese erhalten haben kopieren Sie die Dateien in das Verzeichnis "C:\DEXPRO\SQUEEZE\repository\config\worker\data\licences".

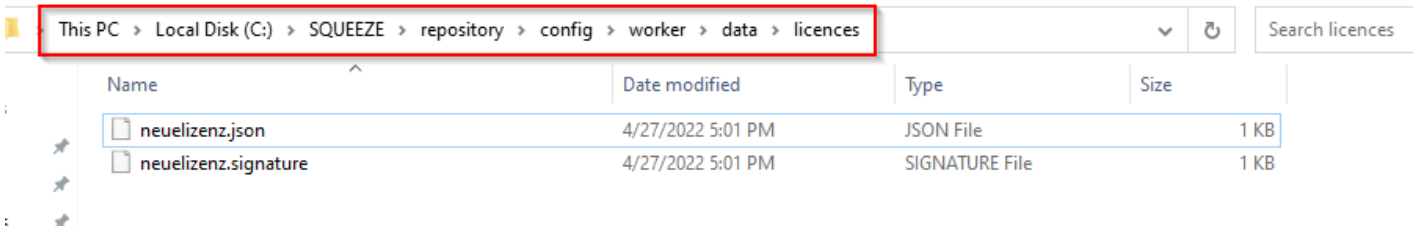

| This PC > Local Disk (C:) > SQUEEZE > repository > config > worker > data > licences | | | | | Search licences |
|--|-------------------|----------------|------|--|-----------------|
| Name | Date modified | Type | Size | | |
| neuelizenz.json | 4/27/2022 5:01 PM | JSON File | 1 KB | | |
| neuelizenz.signature | 4/27/2022 5:01 PM | SIGNATURE File | 1 KB | | |

Im Anschluss muss die local.yml-Datei im Verzeichnis "C:\DEXPRO\SQUEEZE\repository\config\worker\config" modifiziert werden.

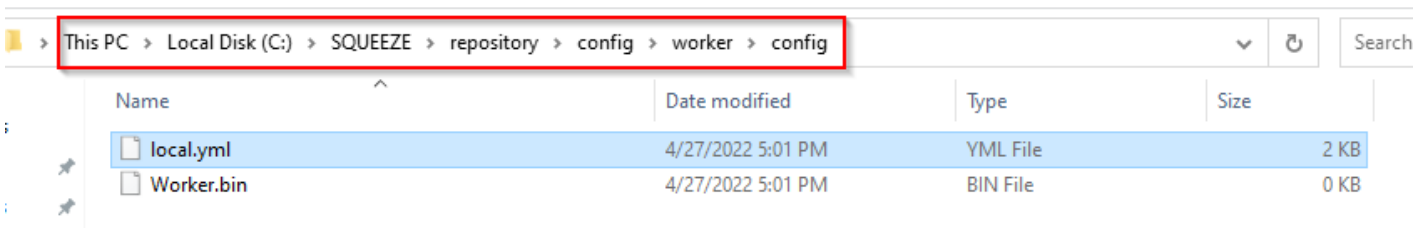

| This PC > Local Disk (C:) > SQUEEZE > repository > config > worker > config | | | | | Search |
|---|-------------------|----------|------|--|--------|
| Name | Date modified | Type | Size | | |
| local.yml | 4/27/2022 5:01 PM | YML File | 2 KB | | |
| Worker.bin | 4/27/2022 5:01 PM | BIN File | 0 KB | | |

In der local.yml müssen nun die markierten Werte angepasst werden. Im Bereich Worker muss der Wert "localhost" (wie hier im Beispiel) durch den Mandantennamen ersetzt werden. Das Gleiche gilt für den Eintrag unter "Authentication -> keys". Zum Schluss wird im letzten markierten Feld der Api-Key eingetragen.

```
1 # Don't change default.yml. That file is overwritten when updating Squeeze.
2 # Please use local.yml instead!
3
4 # RabbitMQ
5 mq:
6   host: localhost
7   port: 5672
8   user: squeeze
9   pwd: squeeze
10  # If set to false, the worker will not connect to any queues. Use for debugging
11  active: true
12
13 # Configuration of the worker itself
14 worker:
15   subprocesslimits:
16     "localhost": 4
17
18 # Information related to the Squeeze PHP application
19 squeeze:
20   host: http://localhost:80
21
22 # Path to the php executable. Normally this only needs to be set on windows
23 phpExecutable: C:/SQUEEZE/php/php.exe
24
25 # This folder contains for example: "app/", "bootstrap/", "vendor/"
26 # Default for linux: /var/www/html/Squeeze
27 # Default for Windows: D:/SQUEEZE/htdocs
28 squeezeRoot: "C:/SQUEEZE/htdocs"
29
30 # Path inside `squeezeRoot` that points to the `worker_node.php`
31 # This should always be the same since this is the predefined project structure.
32 workerFile: "public/worker_node.php"
33
34 # If disabled the worker will not send any mails regarding licencing or similar.
35 sendAdminMails: false
36
37 # Notifications are sent to this / these mail addresses.
38 admins:
39   - support@dexp-solutions.de
40
41 # Authentication - You need to configure a key for each client.
42 auth:
43   keys:
44     "localhost": changeMeToRealApiKey
45
```

Revision #3

Created 25 March 2022 10:39:00 by Jan Vogl

Updated 17 August 2022 06:00:50 by Jan Vogl